


80A High current connection harness

Specifications

Rated current	80A	Inserthead	80A
Wirelong	30 centimeters	Applicable temperature	-60~200℃
holepath	8mm	Conductor material	Tin-plated copper
Wireregulation	7AWG	Insulating material	Silicone (flame retardant, resistant to high and low temperatures)
Note: Wire length, wire diameter, and terminal hole diameter can be customized to meet the needs of different equipment.			

Produce Size

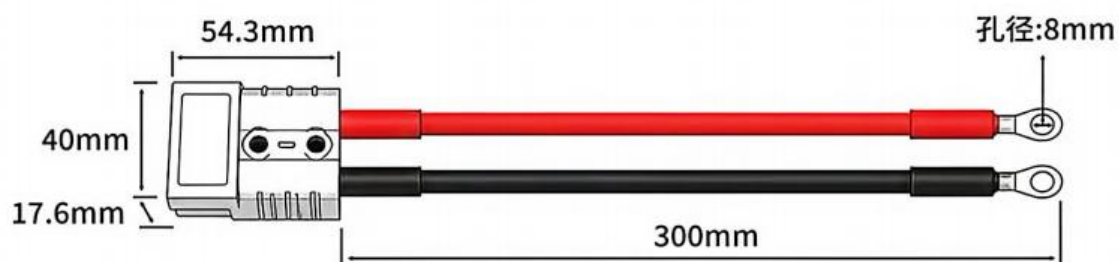

suitable use Scene



RV energy storage



electric vehicles



forklift



Solar energy storage



Lithium battery charging and discharging

Note: Customizable wire length, wire diameter, and terminal specifications are supported to meet different application needs.