


3-STAGE BATTERY CHARGER

MODEL: BL-PBC200W-24-5N (for lead acid)



COMPLY WITH ISO9001:2008

High Efficiency Smart Battery Charger For Lead Acid Battery 3 Stages Lead-Acid Charge Mode With Neutrik Clip

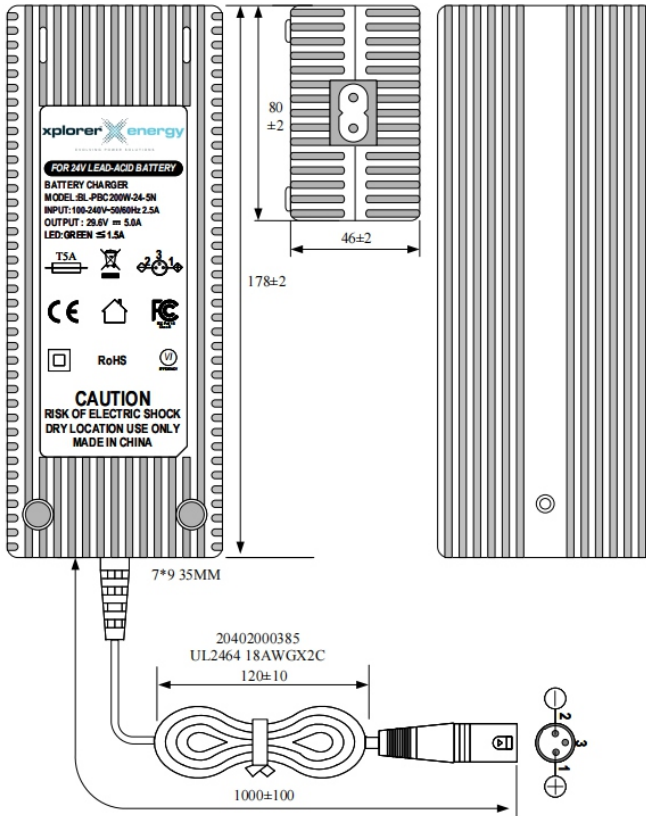


INPUT RATING

- ▶ Input Voltage : 100~240 VAC
- ▶ Input Frequency: 50/60 HZ

OUTPUT RATING

- ▶ Charge voltage max. : 29.6±0.2 Vdc
- ▶ Charge hold voltage: 27.6±0.2 Vdc
- ▶ Charge voltage min.: 16 Vdc
- ▶ Charge current: 5A±0.5 A
- ▶ Loading: 24V Lead Acid battery
- ▶ When charge current ≤ 1.5A, the LED light turn to green.

CHARGE CHARACTERISTICS

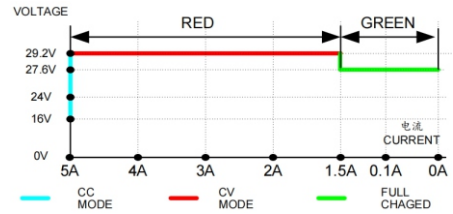

MECHANICAL DATA

- ▶ Dimensions : 178 x 80 x 46mm
- ▶ Net weight: 0.78kg/pcs

APPLICATION MARKET



SOLAR POWER SYSTEM SUPPLIER

