

3-STAGE BATTERY CHARGER

MODEL: BL-PBC200W-24Li-7N (for LiFePO4)




COMPLY WITH ISO9001:2008

High Efficiency Smart Battery Charger

For 25.6V LiFePO4 Battery

3 Stages Charge Mode

With Neutrik Clip

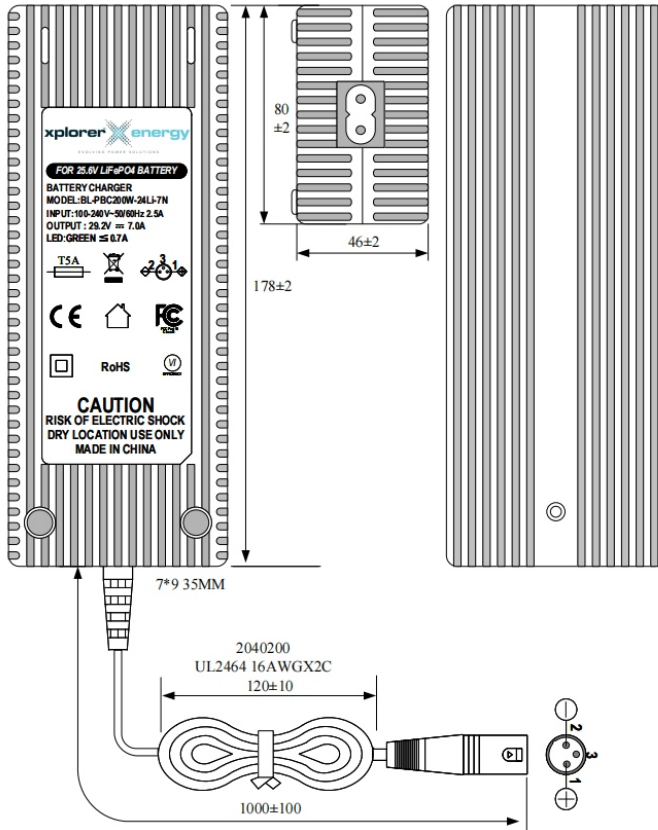


INPUT RATING

- ▶ Input Voltage : 100~240 VAC
- ▶ Input Frequency: 50/60 HZ

OUTPUT RATING

- ▶ Charge voltage max. : 29.2±0.2 Vdc
- ▶ Charge hold voltage: 29.2±0.2 Vdc
- ▶ Charge voltage min.: 16 Vdc
- ▶ Charge current: 7A±0.7 A
- ▶ Loading: 3.65Vx8S LiFePO4 battery
- ▶ When charge current ≤ 0.7A, the LED light turn to green.

CHARGE CHARACTERISTICS

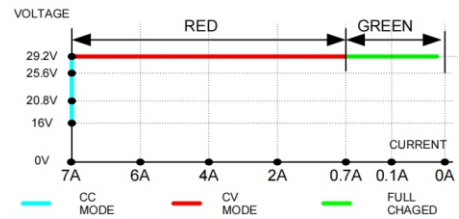

MECHANICAL DATA

- ▶ Dimensions : 178 x 80 x 46mm
- ▶ Net weight: 0.78kg/pcs

APPLICATION MARKET



SOLAR POWER SYSTEM SUPPLIER

