


3-STAGE BATTERY CHARGER

MODEL: BL-PBC60W-12-4A (for lead acid)



COMPLY WITH ISO9001:2008

High Efficiency Smart Battery Charger For Lead Acid Battery 3 Stages Charge Mode With Anderson Clip

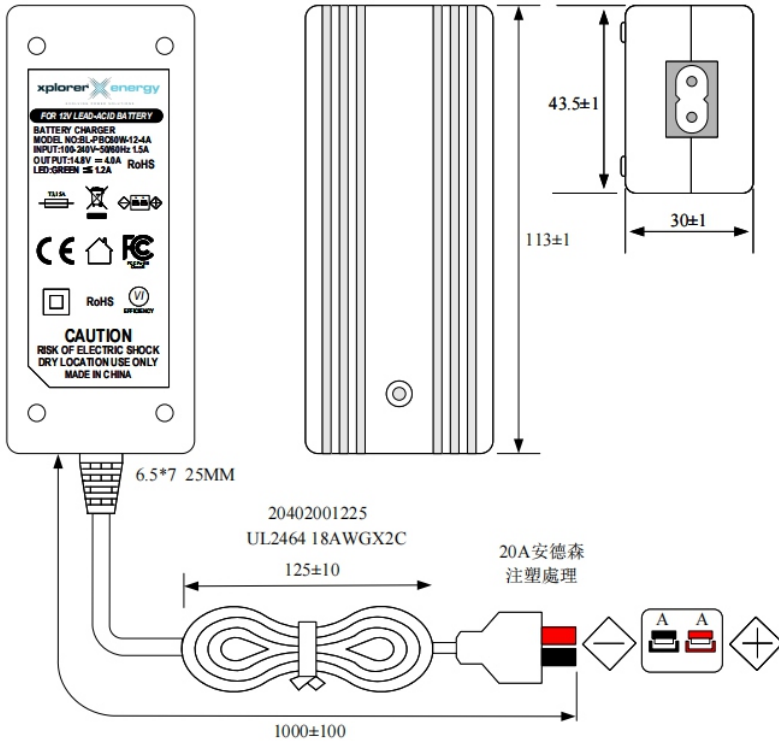


INPUT RATING

- ▶ Input Voltage : 100~240 VAC
- ▶ Input Frequency: 50/60 HZ

OUTPUT RATING

- ▶ Charge voltage max. : 14.8±0.2 Vdc
- ▶ Charge hold voltage: 13.8±0.2 Vdc
- ▶ Charge voltage min. : 8 Vdc
- ▶ Charge current: 4A±0.4 A
- ▶ Loading: 12V Lead Acid battery
- ▶ When charge current ≤ 1.2A, the LED light turn to green.

CHARGE CHARACTERISTICS

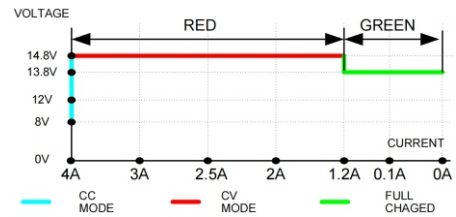

MECHANICAL DATA

- ▶ Dimensions : 113 x 43.5 x 30mm
- ▶ Net weight: 0.35kg/pcs

APPLICATION MARKET



SOLAR POWER SYSTEM SUPPLIER

