


# 3-STAGE BATTERY CHARGER

MODEL: BL-PBC60W-12Li-4A (for LiFePO4)



COMPLY WITH ISO9001:2008

## High Efficiency Smart Battery Charger For 12.8V LiFePO4 Battery 3 Stages Charge Mode With Anderson Clip

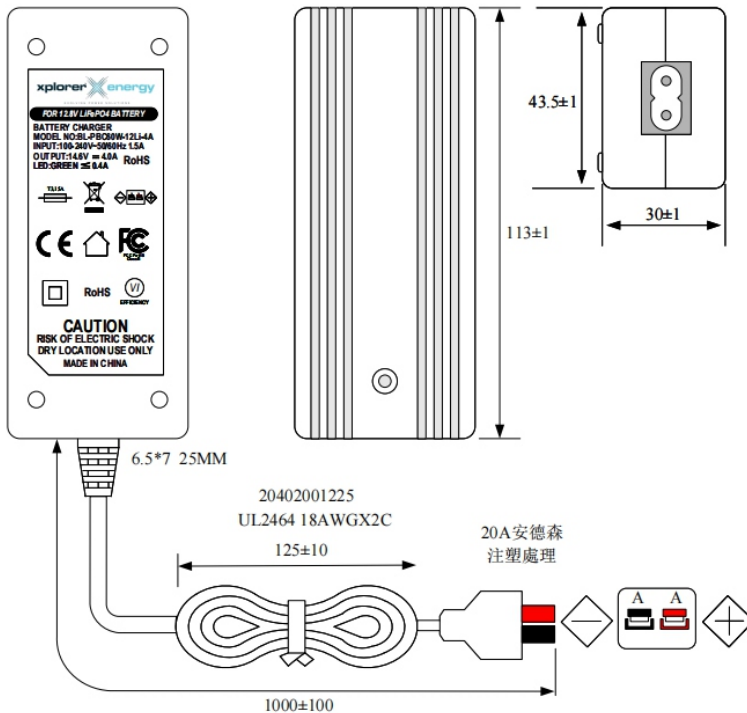


### INPUT RATING

- ▶ Input Voltage : 100~240 VAC
- ▶ Input Frequency: 50/60 HZ

### OUTPUT RATING

- ▶ Charge voltage max. : 14.6±0.2 Vdc
- ▶ Charge hold voltage: 14.6±0.2 Vdc
- ▶ Charge voltage min. : 8 Vdc
- ▶ Charge current: 4A±0.4 A
- ▶ Loading: 3.65Vx4S LiFePO4 battery
- ▶ When charge current ≤ 0.4A, the LED light turn to green.

### CHARGE CHARACTERISTICS

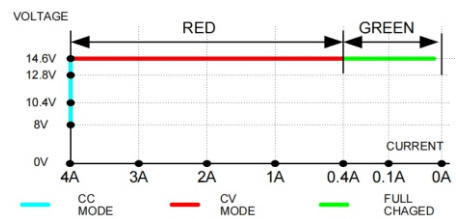

### MECHANICAL DATA

- ▶ Dimensions : 113 x 43.5 x 30mm
- ▶ Net weight: 0.35kg/pcs

## APPLICATION MARKET



SOLAR POWER SYSTEM SUPPLIER

