

Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	134Ah@20hr-rate to 1.75V per cell @25°C 150Ah@20hr-rate to 1.80V per cell @25°C
Weight	Approx. 39.0 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 4.4 mΩ
Terminal	F12(M8)/F5(M8)
Max. Discharge Current	1340A (5 sec)
Design Life	12 years (floating charge)
Max. Charging Current	40.2 A
Reference Capacity	C10 127.6AH C20 134.0AH C100 150.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	EXP Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharging. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment and cable TV etc.



ISO 9001



ISO 14001







OHSAS 18001



MH 28539



Dimensions



F12 Terminal

Length	340±2mm (13.4 inches)
Width	173±2mm (6.81 inches)
Height	280±2mm (11.0 inches)
Total Height	287±2mm (11.3 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR	24HR	48HR	72HR	100HR
1.60V	309.1	243.1	145.9	81.38	48.47	37.75	29.61	25.19	16.16	13.40	6.945	6.05	3.17	2.19	1.62
1.65V	284.7	227.4	138.2	78.61	46.84	36.59	28.73	24.40	16.03	13.27	6.908	5.96	3.12	2.16	1.59
1.70V	263.9	213.8	131.1	76.09	45.59	35.05	27.84	23.74	15.78	13.02	6.821	5.87	3.08	2.12	1.57
1.75V	242.1	200.3	125.9	73.70	43.85	34.14	27.08	23.08	15.52	12.89	6.700	5.79	3.03	2.09	1.55
1.80V	220.3	183.4	121.3	70.42	42.35	33.50	26.45	22.78	15.27	12.76	6.635	5.61	2.94	2.03	1.50
1.85V	172.4	151.7	102.8	62.87	38.72	31.18	24.80	20.97	14.38	12.00	6.573	5.39	2.82	1.95	1.44

Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR	24HR	48HR	72HR	100HR
1.60V	513	407	248	152	93.9	71.3	56.7	47.9	33.2	28.3	14.4	12.50	6.54	4.52	3.34
1.65V	509	403	246	150	93.0	70.6	56.2	47.6	32.9	28.0	14.3	12.37	6.48	4.47	3.30
1.70V	492	390	240	147	91.2	69.3	55.3	46.9	32.4	27.7	14.2	12.23	6.41	4.42	3.27
1.75V	469	373	233	142	88.6	67.6	54.0	46.0	31.8	27.2	13.9	12.01	6.29	4.34	3.21
1.80V	434	348	222	136	85.0	65.1	52.2	44.6	30.9	26.5	13.6	11.70	6.13	4.23	3.13
1.85V	383	310	205	126	79.6	61.3	49.5	42.5	29.6	25.4	13.1	11.22	5.87	4.06	3.00

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.


Discharge Characteristics Curve

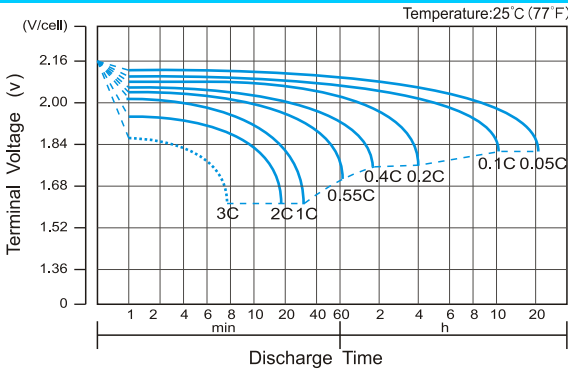


Charge Characteristic Curve for Cycle Use(IU)

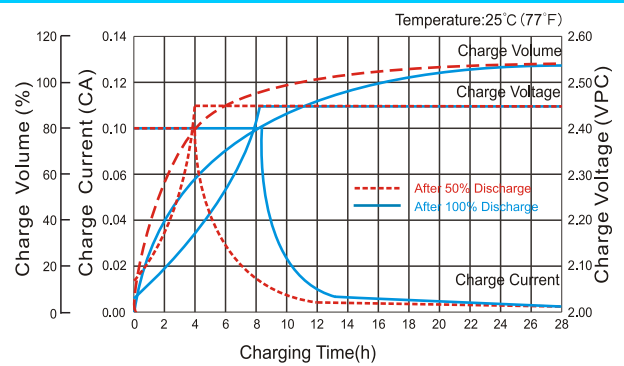


Cycle Life in Relation to Depth of Discharge

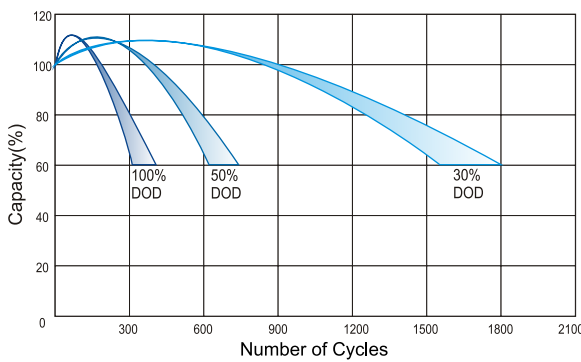


Relationship Between Charging Voltage and Temperature

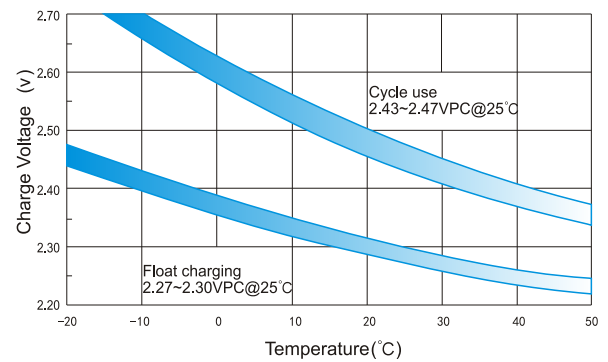


Temperature Effects on Capacity

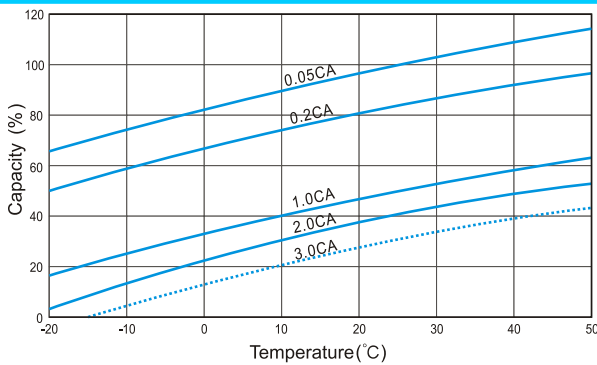


Storage Characteristics

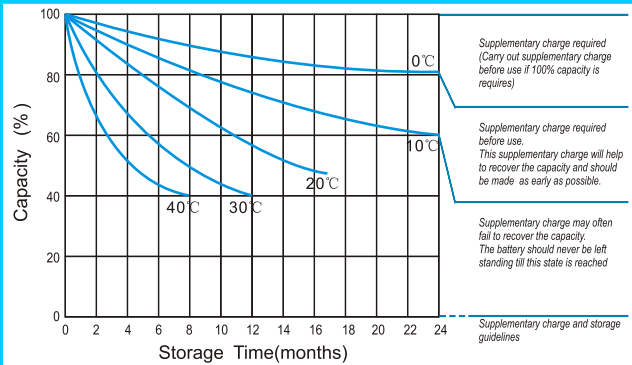

Effect of Temperature on Long Term Life

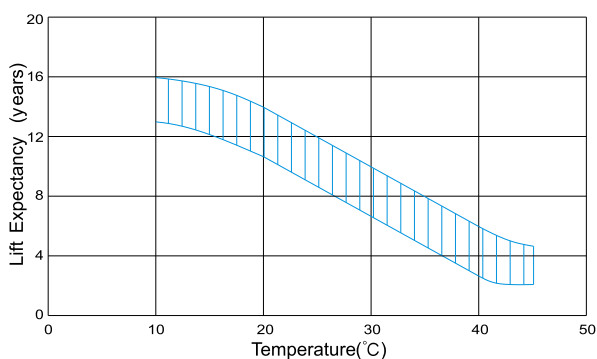

Relationship of OCV And State of Charge(20°C)

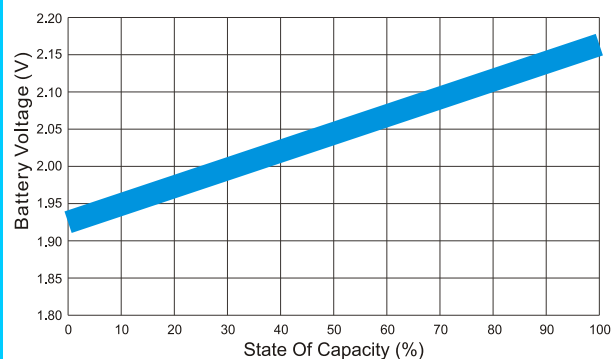

(Note) All above information shall be changed without prior notice, EXP reserves the right to explain and update the latest information.